

## 3 Port 1064nm Polarization Insensitive Circulator


Features
Low Insertion Loss
High Return Loss

Applications
Fiber Laser

### Specification

Parameter	Unit	Value
Operation Wavelength	nm	1064
Bandwidth	nm	±10
Typ. Insertion Loss	dB	1.8
Insertion Loss	dB	<2.1
Channel Peak Isolation	dB	25
Channel Isolation	dB	20
Polarization Dependent Loss	dB	≤0.2
Return Loss	dB	≥50
Power Handling	mW	300
Operating Temperature	°C	0 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimensions	mm	L35xW8.4xH8.4

### Package Dimensions

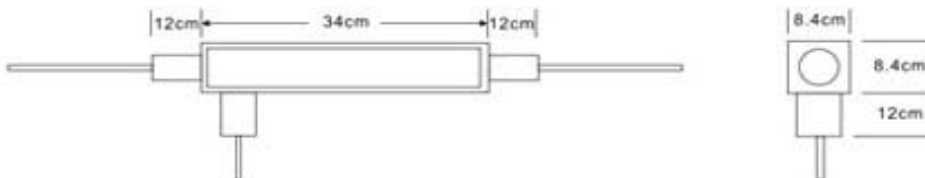

### Ordering Information

CIR	Port	Wavelength	Pigtail	Fiber	length	Connector
	3 Port	10=1064	0=250um bare fiber 1=900um loose tube	1=HI1060	0.8=0.8m S=Specify	00=none FC,SC,LC,MU, ST/UPC,APC