

In Line Fixed Optical Attenuator (FOA)


Features
High precision Excellent Stability and Reliability

Applications
Optical communication systems CATV Network

Specifications

Parameter	Type	
	In line	
Wavelength (nm)	1310/1550	
Bandwidth(nm)	± 50	
Attenuation range (dB)	1~20	
Attenuation precision (dB)	±10% Attenuate Value	
Pigtail Type	250um bare fiber	900um/2mm/3mm loose
Package	Φ3×54	Φ4×75
Operating temperature (°C)	-20 ~ 75	
Storage temperature (°C)	-40 ~ 85	

Package Dimensions

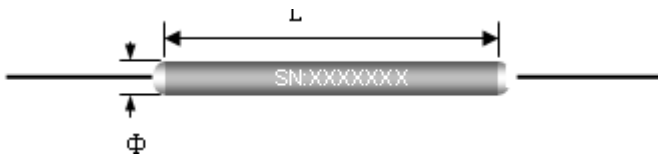

Ordering Information

FOA	Type	Wavelength	Attenuation	Pigtail	Fiber	Length	Connector	Package
	I=In Line	1310	1=1dB	1=900um loose tube	0=SMF-28e	1m	00=none	3x54 4x75
		1550	X=Specify	2=2mm loose tube	2=50/125	S=Specify	FC,SC,LC,ST,M U/UPC,APC	
		1310/1550		3=3mm loose tube	3=62.5/125			